


12 AS 1930 TO ZF-ASTronic (Truck)

Automatic transmission system for heavy trucks

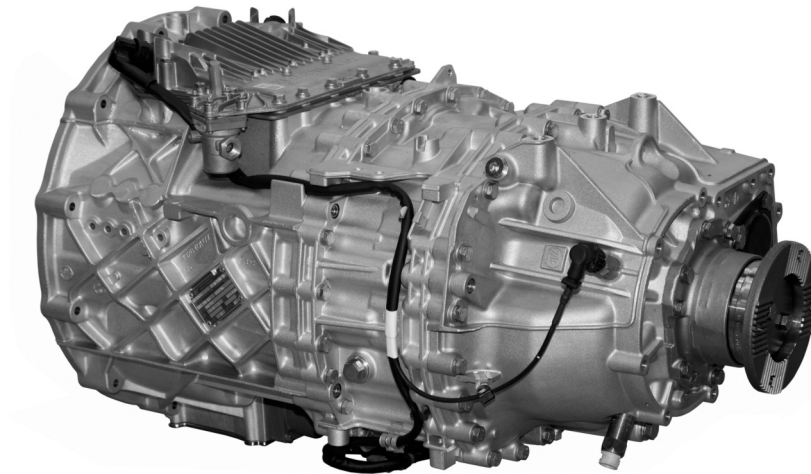

- 12 AS 1930 TO - Basic transmission
- 12 AS 1931 TO - Transmission with Intarder
- 12 AS 1935 TO - Transmission with clutch-dependent PTO

Transmission type	12 AS 1930 TO
Input torque	max. 1900 Nm
Weight* without auxiliaries	≈ 240 kg
Oil capacity for initial filling	≈ 12 dm ³
Oil grade	as specified in ZF List of Lubricants TE-ML 02
Clutch bell housing SAE 1	integrated
Additional weight for ZF-Intarder	≈ 70 kg
Additional oil quantity for ZF-Intarder	≈ 10 dm ³

*without oil fill, clutch and clutch release components


Standard ratios in gear

1	2	3	4	5	6	7	8	9	10	11	12	R1	R2
12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	11.41	8.88


→ see also Data Sheet for Intarder: IT_AS_Tronic_Truck_EN

12 AS 1930 TO

Installation dimensions

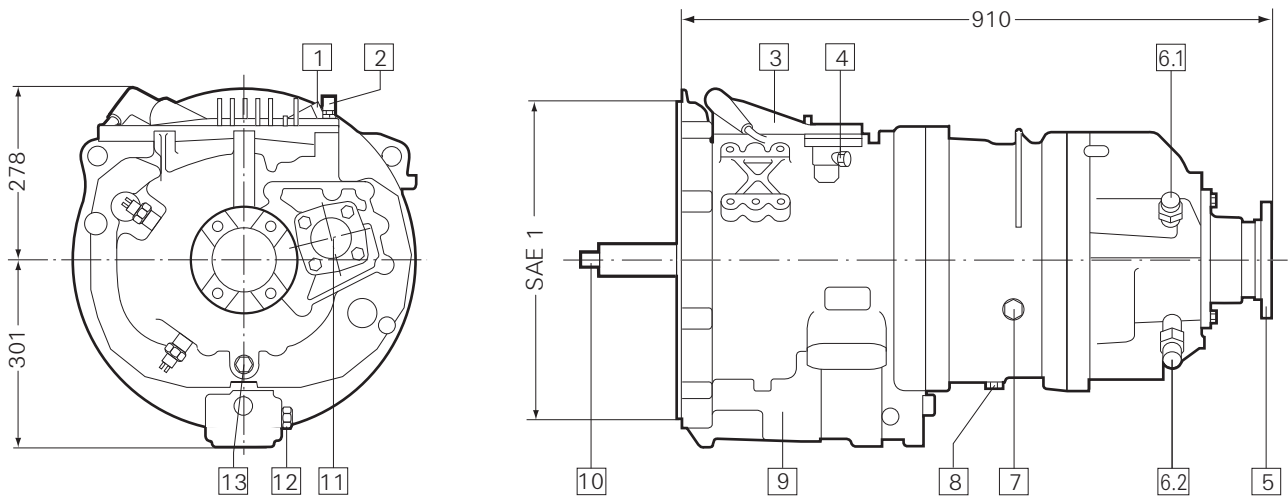

- 1 Electrical connection
- 2 Breather
- 3 Gearshift module
- 4 Compressed air connection
- 5 Output
- 6.1 Speedo sensor, transmission side
- 6.2 Speedo sensor, vehicle side
- 7 Oil fill and oil level check
- 8 Oil drain
- 9 Clutch module
- 10 Input
- 11 Connection point for clutch-dependent PTO
- 12 Compressed air connection
- 13 Oil drain

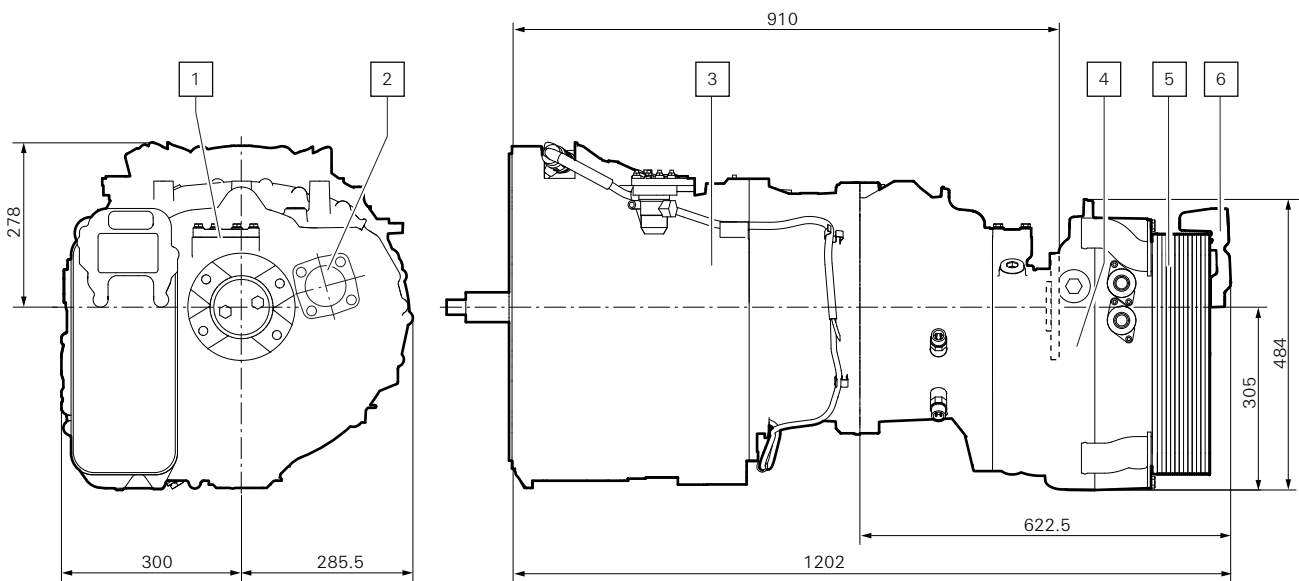

- 1 Option to fit steering pump drive
- 2 Connection for PTO
- 3 ZF-AS Tronic transmission
- 4 ZF-Intarder unit
- 5 Oil/water heat exchanger